


# Custom Belts For Precision and Critical Applications

Berg offers an extensive line of custom belts including timing belts, misalignment drive belts, v-belts, link chains, and cable chains

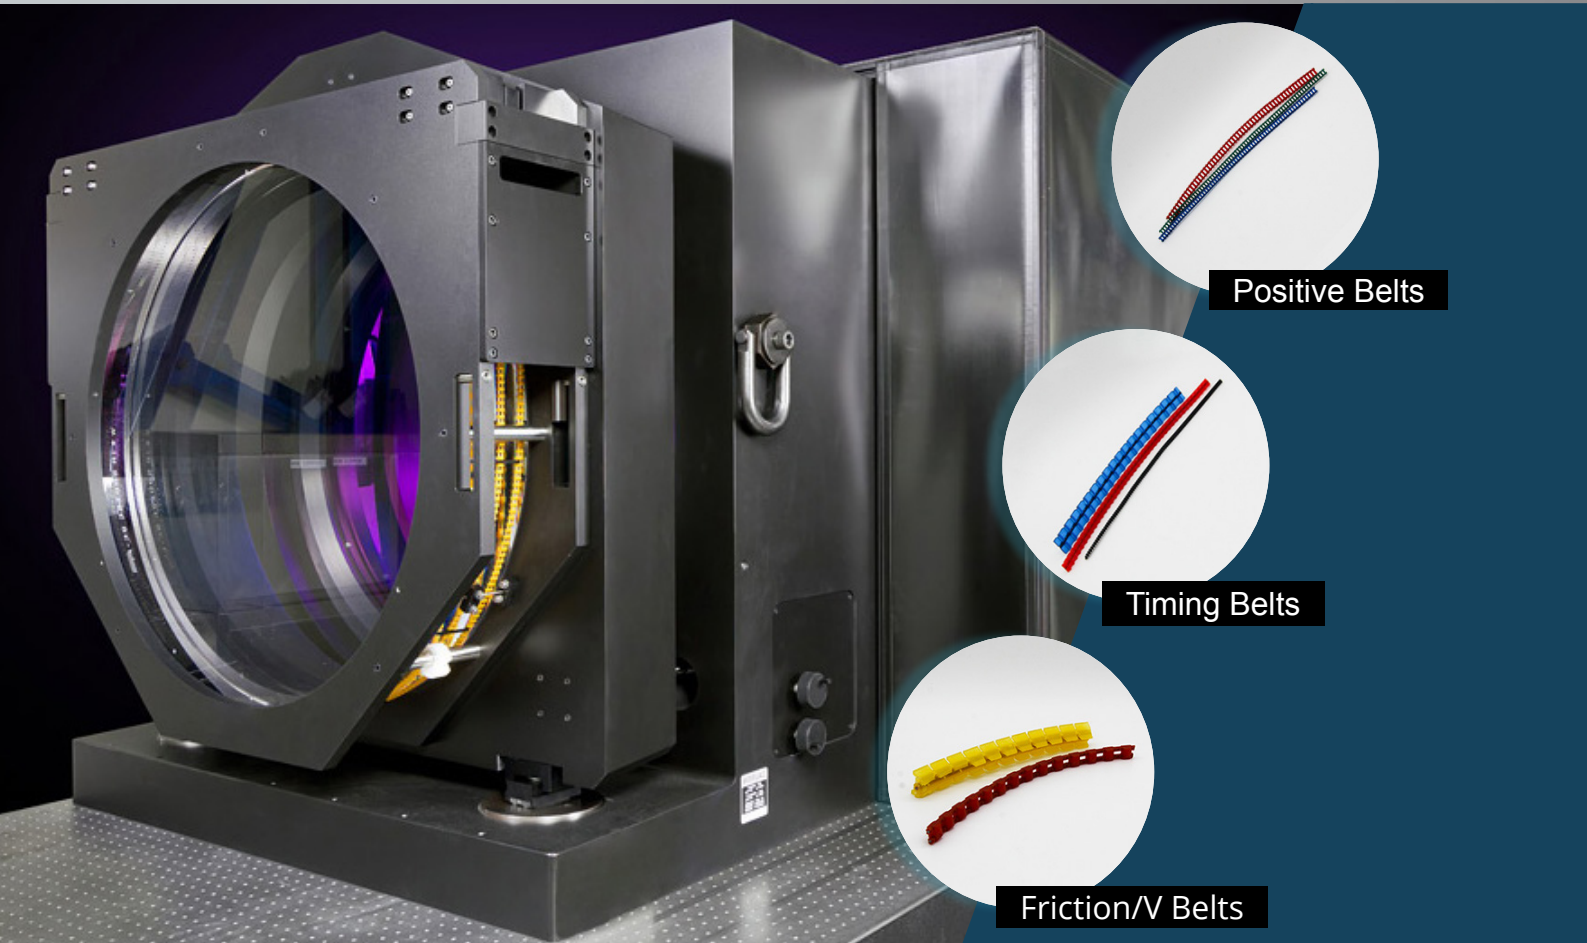

## The benefits of our **BELTS AND CHAINS**

For 50 years, customers have been relying on Berg's engineering services and staff of specialists to provide custom belts that best suit control and instrumentation applications. Our belts are molded with polyurethane over a stainless steel cable. Many of these belts are also available in Kevlar for applications requiring greater flexibility. For applications that require durability, we also offer stainless steel and airline cable material options.

**Customers choose Berg belts because they provide greater flexibility and longer life for applications.**



[www.wmberg.com](http://www.wmberg.com)  
5138 International Dr. | Cudahy | WI 53110  
Customer Service | 800-232-2374

# TECHNICAL INFORMATION



## Features:

- No backlash
- Lightweight
- Silent operation
- Custom lengths
- No lubrication required
- Rust proof

## Materials:

### Polyurethane:

- Antistatic
- Flame resistant
- Available in 10 colors


### Reinforcements:

- Kevlar
- Stainless steel airline cable


## Technical characteristics

| Type             | Family       | Circular Pitch | Width        | Ultimate Tensile Strength |
|------------------|--------------|----------------|--------------|---------------------------|
| Positive Belts   | Flex-E-Pitch | .148 - .500"   | .23 - .40"   | 100 - 300 lbs             |
|                  | Flex-E-Belt  | .098 - .1309"  | .203 - .25"  | 20 - 50 lbs               |
|                  | Flex-E-Gear  | .098 - .1309"  | .203 - .281" | 30 - 100 lbs              |
|                  | Row-L-ER     | .148 - .500"   | .176 - .725" | 180 - 2400 lbs            |
|                  | Min-E-Pitch  | .157"          | .203 - .375" | 100 lbs                   |
| Timing Belts     | Flex-E-Grip  | .0816 - .500"  | .125 - 2.5"  | 20 - 125 lbs              |
|                  | Max-M-Drive  | .079 - .375"   | .125 - .590" | 25 - 114 lbs              |
| Friction/V Belts | Pow-R-Vee    | -              | .25 - .5"    | 50 - 350 lbs              |


## Belts & Chains



Flex-E-Belt



Flex-E-Gear



Flex-E-Grip



Flex-E-Pitch




Max-M-Drive



Min-E-Pitch



Pow-R-Vee



Row-L-ER



Misc. Belts



[www.wmberg.com](http://www.wmberg.com)

5138 International Dr. | Cudahy | WI 53110

Customer Service | 800-232-2374