


# TIMING BELTS

CIRCULAR PITCH	BELT WIDTH	MATERIALS	BERG'S ® NAME	PULLEY
<b>.375 (L)</b>	<b>1/2"</b>	Polyurethane (Blue) 90A Duro 3/64" Stainless Steel Cable*	<b>Flex-E-Grip®</b>	Operates with 37TP Series

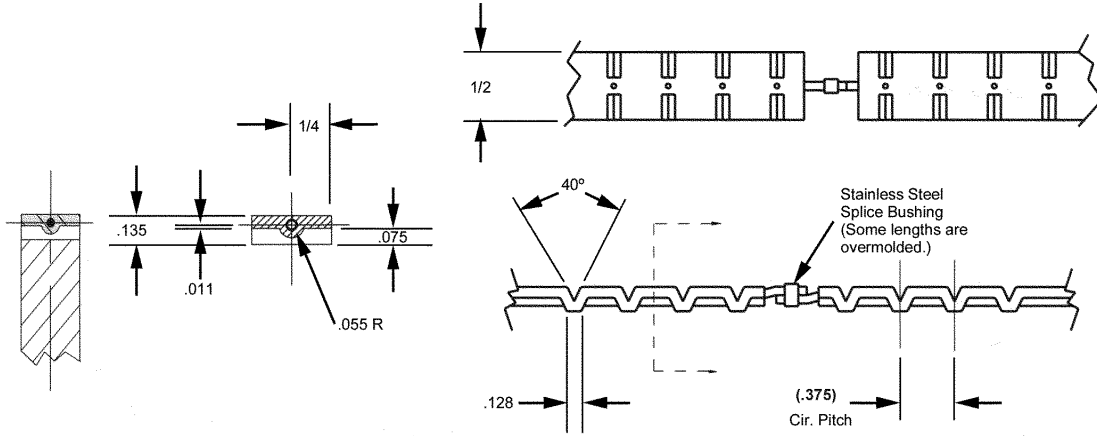

STOCK NO.	NO. OF PITCHES	LENGTH (Ref.)
37TB-20	20	7.500
37TB-22	22	8.250
37TB-24	24	9.000
37TB-26	26	9.750
37TB-28	28	10.500
37TB-30	30	11.250
37TB-33	33	12.375
37TB-36	36	13.500
37TB-40	40	15.000
37TB-45	45	16.875
37TB-50	50	18.750
37TB-56	56	21.000
37TB-60	60	22.500
37TB-64	64	24.000
37TB-68	68	25.500
37TB-72	72	27.000
37TB-80	80	30.000
37TB-86	86	32.250
37TB-92	92	34.500
37TB-98	98	36.750
37TB-100	100	37.500
37TB-104	104	39.000
37TB-108	108	40.500
37TB-112	112	42.000
37TB-116	116	43.500
37TB-120	120	45.000
37TB-124	124	46.500
37TB-128	128	48.000
37TB-132	132	49.500
37TB-136	136	51.000
37TB-140	140	52.500
37TB-144	144	54.000
37TB-148	148	55.500
37TB-152	152	57.000
37TB-156	156	58.500
37TB-160	160	60.000
37TB-176	176	66.000

Aramid Core. Alternate construction available.

- No Flanges Required
- Infinite Lengths
- Silent Drive
- No-Walk Feature
- No Lubrication
- Weight .41 oz./ft.
- Compact Design
- Positive Drive
- Light Weight
- Extra Strong
- Ultimate Tensile Strength 50 lbs.
- Temperature Range +180°F to -15°F
- Recommended Operating Load 30 lbs.
- Recommended Max. Operating Speed 376 ft./min.
- For Field Splice Kit Order 37TB-7

\* Splices are factory overmolded

BULK FOOTAGE - NOT SPLICED	
STOCK NO.	LENGTH
37TB-5FT	5 FT
37TB-10FT	10 FT
37TB-25FT	25 FT
37TB-50FT	50 FT
37TB-100FT	100 FT

