
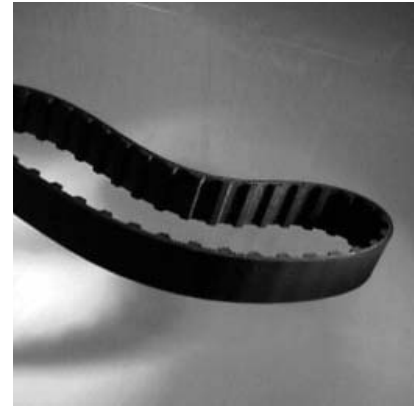


# TIMING BELTS

CIRCULAR PITCH	BELT WIDTH	MATERIALS	BERG'S ® NAME	PULLEY
<b>.200 (XL)</b>	<b>1/4"</b>	Neoprene (Black) Fiberglass Reinforced or Urethane (Black or Orange)	<b>Max-M-Drive®</b>	Operates with TP20 Series

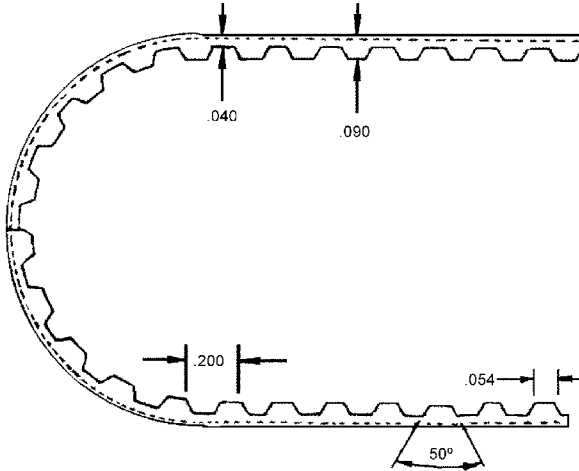

NEOPRENE STOCK NO.	URETHANE STOCK NO.	NO. OF GROOVES	LENGTH (Ref.)
TB20EF4-25	TB20UP4-25	25	5.00
TB20EF4-30	TB20UP4-30	30	6.00
TB20EF4-35	TB20UP4-35	35	7.00
TB20EF4-40	TB20UP4-40	40	8.00
TB20EF4-45	TB20UP4-45	45	9.00
-	TB20UP4-47	47	9.40
-	TB20UP4-48	48	9.60
TB20EF4-50	TB20UP4-50	50	10.00
TB20EF4-55	TB20UP4-55	55	11.00
TB20EF4-60	TB20UP4-60	60	12.00
TB20EF4-65	TB20UP4-65	65	13.00
TB20EF4-70	TB20UP4-70	70	14.00
TB20EF4-75	TB20UP4-75	75	15.00
TB20EF4-80	TB20UP4-80	80	16.00
-	TB20UP4-83	83	16.60
TB20EF4-85	TB20UP4-85	85	17.00
TB20EF4-90	TB20UP4-90	90	18.00
TB20EF4-95	TB20UP4-95	95	19.00
TB20EF4-100	TB20UP4-100	100	20.00
-	TB20UP4-105	105	21.00
TB20EF4-110	TB20UP4-110	110	22.00
TB20EF4-115	TB20UP4-115	115	23.00
TB20EF4-120	TB20UP4-120	120	24.00
TB20EF4-125	TB20UP4-125	125	25.00
TB20EF4-130	TB20UP4-130	130	26.00
TB20EF4-135	TB20UP4-135	135	27.00
TB20EF4-140	TB20UP4-140	140	28.00
TB20EF4-145	TB20UP4-145	145	29.00
TB20EF4-150	TB20UP4-150	150	30.00
TB20EF4-155	-	155	31.00
TB20EF4-165	TB20UP4-165	165	33.00
-	TB20UP4-172	172	34.40
-	TB20UP4-175	175	35.00
-	TB20UP4-180	180	36.00
-	TB20UP4-230	230	46.00

- Large Ratios
- Allows use of small diameter pulleys
- High Speeds
- High Power Transmission
- Quiet Operation
- Wear resistant nylon facing
- Maximum Speed 10,000 RPM
- Minimum Pulley Diameter .64 (10 teeth)
- Temperature Range +185°F to -30°F