
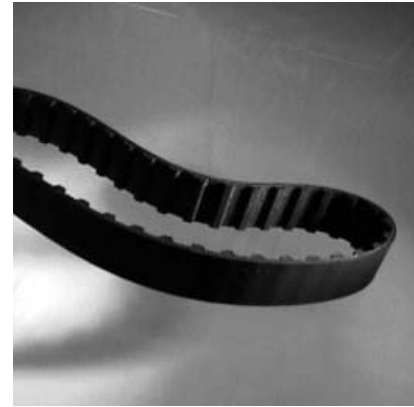


# TIMING BELTS

CIRCULAR PITCH	BELT WIDTH	MATERIALS	BERG'S ® NAME	PULLEY
<b>.200 (XL)</b>	<b>3/8"</b>	Neoprene (Black) Fiberglass Reinforced or Urethane (Black or Orange)	<b>Max-M-Drive®</b>	Operates with TP20 Series

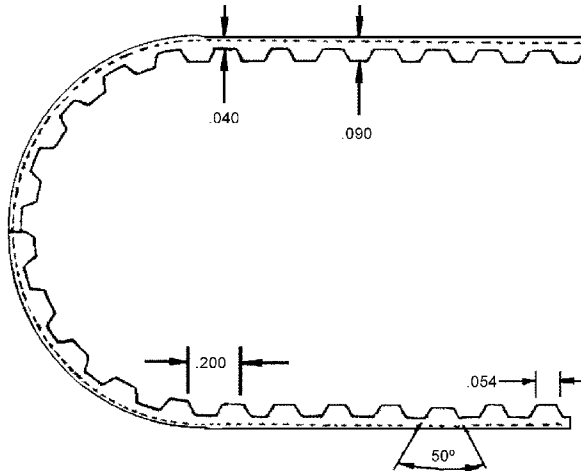

NEOPRENE	URETHANE		
STOCK NO.	STOCK NO.	NO. OF GROOVES	LENGTH (Ref.)
TB20EF6-25	TB20UP6-25	25	5.00
TB20EF6-30	TB20UP6-30	30	6.00
TB20EF6-35	TB20UP6-35	35	7.00
TB20EF6-40	TB20UP6-40	40	8.00
TB20EF6-45	TB20UP6-45	45	9.00
TB20EF6-47	TB20UP6-47	47	9.40
TB20EF6-48	TB20UP6-48	48	9.60
TB20EF6-50	TB20UP6-50	50	10.00
TB20EF6-55	TB20UP6-55	55	11.00
TB20EF6-60	TB20UP6-60	60	12.00
TB20EF6-65	TB20UP6-65	65	13.00
TB20EF6-70	TB20UP6-70	70	14.00
TB20EF6-75	TB20UP6-75	75	15.00
TB20EF6-80	TB20UP6-80	80	16.00
TB20EF6-83	TB20UP6-83	83	16.60
TB20EF6-85	TB20UP6-85	85	17.00
TB20EF6-90	TB20UP6-90	90	18.00
TB20EF6-95	TB20UP6-95	95	19.00
TB20EF6-100	TB20UP6-100	100	20.00
TB20EF6-105	TB20UP6-105	105	21.00
TB20EF6-110	TB20UP6-110	110	22.00
TB20EF6-115	TB20UP6-115	115	23.00
TB20EF6-120	TB20UP6-120	120	24.00
TB20EF6-125	TB20UP6-125	125	25.00
TB20EF6-130	TB20UP6-130	130	26.00
TB20EF6-135	TB20UP6-135	135	27.00
TB20EF6-140	TB20UP6-140	140	28.00
TB20EF6-145	TB20UP6-145	145	29.00
TB20EF6-150	TB20UP6-150	150	30.00
TB20EF6-165	TB20UP6-165	165	33.00
TB20EF6-172	TB20UP6-172	172	34.40
TB20EF6-175	TB20UP6-175	175	35.00
TB20EF6-180	TB20UP6-180	180	36.00
TB20EF6-230	TB20UP6-230	230	46.00

- Large Ratios
- Allows use of small diameter pulleys
- High Speeds
- High Power Transmission
- Quiet Operation
- Wear resistant nylon facing
- Maximum Speed 10,000 RPM
- Minimum Pulley Diameter .64 (10 teeth)
- Temperature Range +185°F to -30°F