



# GEAR RACKS

PITCH	STYLES	MATERIAL	AGMA QUALITY	PRESSURE ANGLE
<b>32</b>	<b>RECTANGULAR</b>	416 SERIES STAINLESS STEEL STRESSED RELIEVED	<b>10</b>	<b>20°</b>

**B**

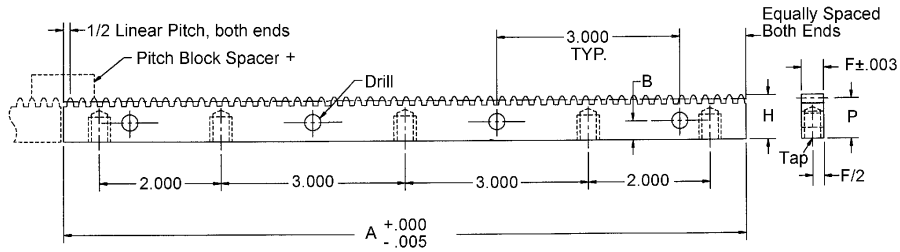

†Spacer block is designed for butting to achieve continuous lengths. On-Line pricing for AGMA 10 only.

RACKS	SPACER BLOCK	AGMA QTY. NO.	MAX ACCUM. ERROR	TOOTH TO TOOTH ERROR	PITCH	LINEAR PITCH	A INCH	P REF.	H +.000 -.005	F	B	DRILL	TAP
R1-5-G1	R1-5-SB	10*	.0014	.0005	32	.0982	11.087	.4437	.475	.230	.218	#26	#6-32 x 1/4
R3-3-G1	R3-3-SB	10*	.0014	.0005	32	.0982	11.087	.4487	.480	.230	.218	#26	#6-32 x 1/4

\* Higher quality on request.