



GEAR RACKS

| PITCH | STYLE | MATERIAL | AGMA QUALITY | PRESSURE ANGLE |
|-----------|--------------------|---|--------------|----------------|
| 96 | RECTANGULAR | 416 SERIES STAINLESS STEEL STRESSED RELIEVED | 10 | 20° |

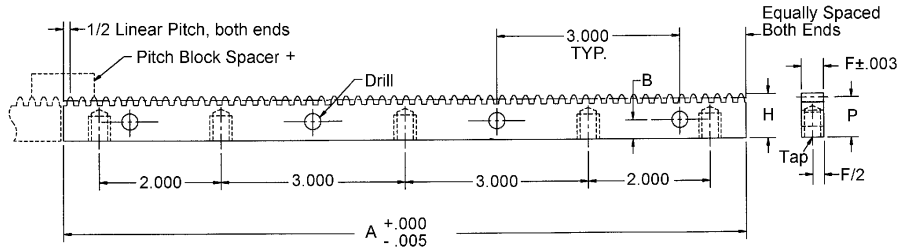

† Spacer block is designed for butting to achieve continuous lengths. On-Line pricing for AGMA 10 only.

| RACKS | SPACER BLOCK | | | | | | | | | | | | |
|----------|--------------|---------------|------------------|----------------------|-------|--------------|--------|--------|-----------------|------|------|-------|--------------|
| | | AGMA QTY. NO. | MAX ACCUM. ERROR | TOOTH TO TOOTH ERROR | PITCH | LINEAR PITCH | A INCH | P REF. | H +.000 / -.005 | F | B | DRILL | TAP |
| R1-11-G1 | R1-11-SB | 10* | .0014 | .0005 | 96 | .0327 | 11.022 | .3396 | .350 | .167 | .156 | #31 | #4-40 X 3/16 |
| R3-8-G1 | R3-8-SB | 10* | .0014 | .0005 | 96 | .0327 | 11.022 | .3446 | .355 | .167 | .156 | #31 | #4-40 X 3/16 |

* Higher quality on request.