


ENGRAVED FLAT DISKS

DIAMETER	MATERIAL
1 1/2" TO 4"	ALUMINUM BLACK ANODIZED

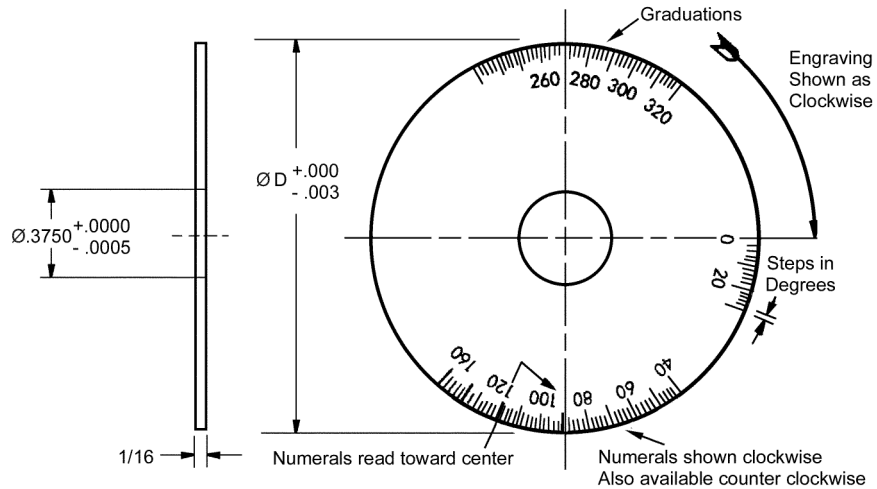

STOCK NO.	D DIAL DIA.	DIRECTION OF NUMBERING	GRADUATIONS RANGE	NO. OF GRAD.S	STEPS IN DEGREES
A8-1	1 1/2	BLANK	-	-	-
A8-2*		CW	0 TO 360	180	2°
A8-3		CW	0 TO 100	100	3°-36'
A8-4		CW	0 TO 50	50	7°-12'
A8-5		CW	0 TO 10	10	36°
A9-1	2	BLANK	-	-	-
A9-2*		CW	0 TO 360	180	2°
A9-3*		CCW	0 TO 360	180	2°
A9-4		CW	0 TO 100	100	3°-36'
A9-5		CCW	0 TO 100	100	3°-36'
A9-6		CW	0 TO 72	72	5°
A9-7		CW	0 TO 60	60	6°
A9-8		CW	0 TO 50	50	7°-12'
A10-1	3	BLANK	-	-	-
A10-2		CW	0 TO 360	360	1°
A10-3*		CW	0 TO 360	180	2°
A10-4		CW	0 TO 200	200	1°-48'
A10-5		CW	0 TO 120	120	3°
A10-6		CW	0 TO 100	100	3°-36'
A10-7		CW	0 TO 72	72	5°
A10-8		CCW	0 TO 360	360	1°
A10-9		CCW	0 TO 100	100	3°-36'
A11-1	4	BLANK	-	-	-
A11-2		CW	0 TO 360	360	1°
A11-3*		CW	0 TO 360	180	2°
A11-4		CW	0 TO 200	200	1°-48'
A11-5		CW	0 TO 100	100	3°-36'
A11-6		CW	0 TO 1000	500	43'-12"
A11-7		CCW	0 TO 360	360	1°
A11-8*		CCW	0 TO 360	180	2°

* Dials are numbered every 20°.

Engraving filled with white.
Range of Graduations - 0 to 1000°

Available on request:
• Pin or Clamp Hubs assembled to drum
• Special Engraving

For Pin and Clamp Hubs see index.

