

ABSORBATHANE FLEXIBLE COUPLINGS

BORE	STYLE	MATERIAL
3/16" TO 3/8"	EXTERNAL HUB	BLACK POLYURETHANE PLATED MILD STEEL HUB

STOCK NO.	BORES B1 AND B2	A	C	D	MAX. WORKING TORQUE lb-in	MAX. PARALLEL MISALIGN	MAX. ANGULAR MISALIGN
CC3-10	3/16	1 1/8	1 1/8	11/16	3	3/32	10°
CC3-11	1/4						
CC3-12	5/16						
CC3-13	3/8						

BORE	STYLE	MATERIAL
1/4" TO 7/16"	INTERNAL HUB	BLACK POLYURETHANE PLATED MILD STEEL HUB



STOCK NO.	BORES 1 AND B2	A	C	D	MAX. WORKING TORQUE lb-in	MAX. PARALLEL MISALIGN	MAX. ANGULAR MISALIGN
CC3-1	1/4	1 7/8	1 3/4	1	12	1/8	15°
CC3-2	5/16						
CC3-3	3/8						
CC3-14	7/16						
CC3-5	1/2						

BORE	STYLE	MATERIAL
1/2" TO 5/8"	INTERNAL HUB	BLACK POLYURETHANE PLATED MILD STEEL HUB

STOCK NO.	BORES B1 AND B2	A	C	D	MAX. WORKING TORQUE lb-in	MAX. PARALLEL MISALIGN	MAX. ANGULAR MISALIGN
CC3-4	3/8	2 1/8	2 1/4	1 1/4	28	3/16	15°
CC3-15	7/16						
CC3-6	1/2						
CC3-16	9/16						
CC3-8	5/8						

BORES	STYLE	MATERIAL
1/2" TO 5/8"	INTERNAL HUB	BLACK POLYURETHANE PLATED MILD STEEL HUB

STOCK NO.	BORES B1 AND B2	A	C	D	MAX. WORKING TORQUE lb-in	MAX. PARALLEL MISALIGN	MAX. ANGULAR MISALIGN
CC3-7	1/2	2 1/8	2 3/8	1 1/4	40	1/8	15°
CC3-17	9/16						
CC3-9	5/8						

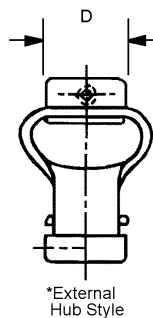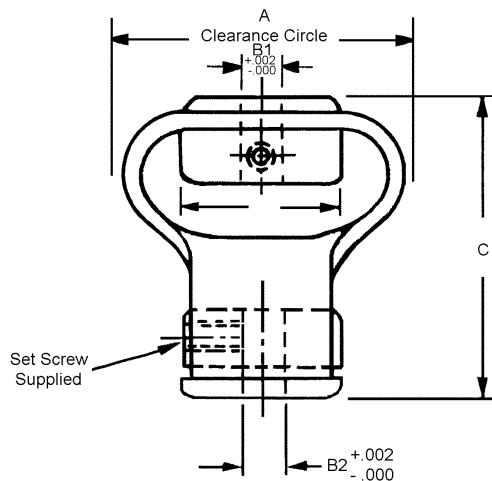

Available on request:
Other bore sizes
or bore combinations.

- Absorbs end play
- Quiet running
- Maintenance free (No moving parts)
- 3600 R.P.M. Maximum

