



V-BELTS

SERIES	WIDTH	HEIGHT	MATERIAL	BERG'S ® NAME	PULLEY
5V	16.6	12.7	Polyurethane (Yellow) with 2.0mm Dia. Stainless Steel Cable	POW-R-VEE®	Operates with Pow-R-Vee 5V Series

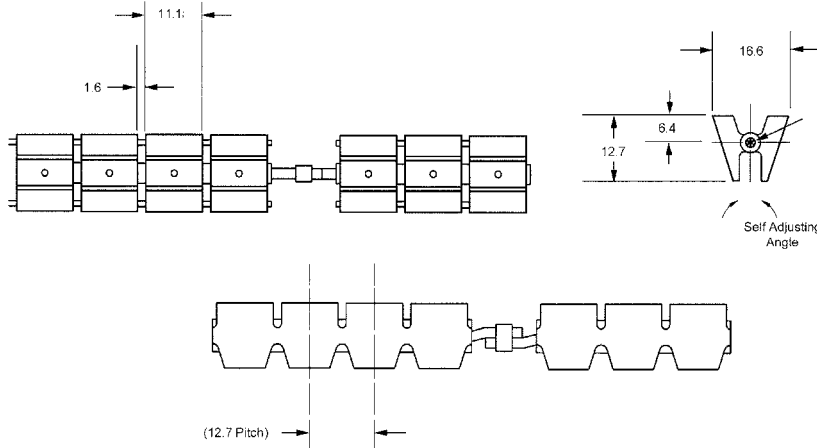

- More sidewall contact
- Less slippage
- Greater power transmission
- Infinite length variations
- Extra strong
- Silent drive
- 90A Durometer
- Mass 130 Grams/Meter
- Ultimate Tensile Strength 1550N
- Temperature Range +82°C to -26°C
- Recommended Operating Load 378N
- Recommended Max. Operating Speed 1.91 m/s
- For Field Splice Order 5V-7.

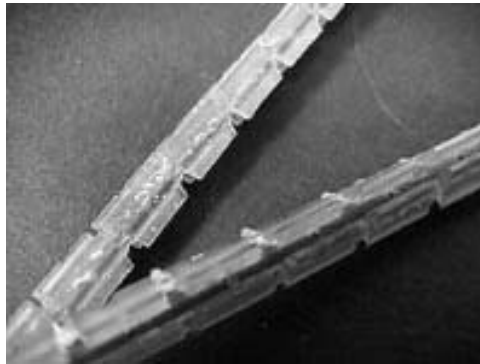

BULK FOOTAGE NOT SPLICED	
STOCK NO.	LENGTH
5V-1.5M	1.5 Meters
5V-3.0M	3.0 Meters
5V-7.5M	7.5 Meters
5V-15.0M	15.0 Meters
5V-30.0M	30.0 Meters

STOCK NO.	LENGTH (Ref.)
5V-15	381.0
5V-16	406.4
5V-17	431.8
5V-18	457.2
5V-19	482.6
5V-20	508.0
5V-21	533.4
5V-22	558.8
5V-23	584.2
5V-24	609.6
5V-25	635.0
5V-26	660.4
5V-27	685.8
5V-28	711.2
5V-29	736.6
5V-30	762.0
5V-31	787.4
5V-32	812.8
5V-33	838.2
5V-34	863.6
5V-35	889.0
5V-36	914.4
5V-37	939.8
5V-38	965.2
5V-39	990.6
5V-40	1016.0
5V-41	1041.4
5V-42	1066.8
5V-43	1092.2
5V-44	1117.6
5V-45	1143.0
5V-46	1168.4
5V-47	1193.8
5V-48	1219.2
5V-49	1244.6
5V-50	1270.0
5V-51	1295.4
5V-52	1320.8
5V-53	1346.2
5V-54	1371.6
5V-55	1397.0
5V-56	1422.4
5V-57	1447.8
5V-58	1473.2
5V-59	1498.6
5V-60	1524.0
5V-61	1549.4
5V-62	1574.8
5V-63	1600.2
5V-64	1625.6
5V-65	1651.0
5V-66	1676.4
5V-67	1701.8
5V-68	1727.2
5V-69	1752.6
5V-70	1778.0
5V-72	1828.8
5V-74	1879.6
5V-76	1930.4
5V-78	1981.2
5V-80	2032.0
5V-82	2082.8
5V-84	2133.6
5V-86	2184.4
5V-88	2235.2
5V-90	2286.0
5V-92	2336.8
5V-96	2438.4