


# GEAR RACKS


PITCH	STYLE	MATERIAL	AGMA QUALITY	PRESSURE ANGLE
20	ROUND & RECTANGULAR	416 SERIES STAINLESS STEEL STRESSED RELIEVED	8	20°

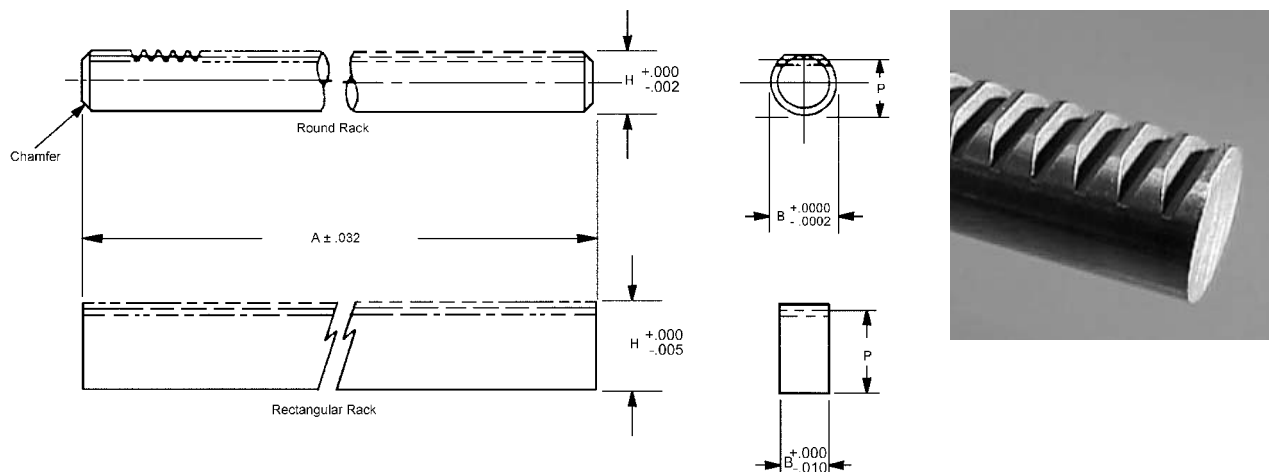

STOCK NO.	RACK STYLE	PITCH	P (Ref.)	B	A	H	AGMA QUALITY
R2-2	ROUND	20	.4800	.6247	24	.530	8
R2-8	RECTANGULAR	20	.6750	.365±.010	24	.725	8

Available on request: 14 - 1/2° pressure angle, special, modified and custom racks.

PITCH	STYLE	MATERIAL	AGMA QUALITY	PRESSURE ANGLE
20	RECTANGULAR	416 SERIES STAINLESS STEEL STRESSED RELIEVED	10	20°

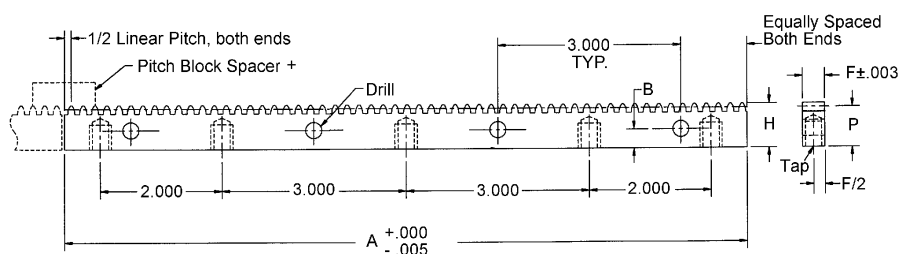

†Spacer block is designed for butting to achieve continuous lengths. On-Line pricing for AGMA 10 only.

RACKS	SPACER BLOCK	AGMA QTY. NO.	MAX ACCUM. ERROR	TOOTH TO TOOTH ERROR	PITCH	LINEAR PITCH	A INCH	P REF.	H +.000 / -.005	F	B	DRILL	TAP
R1-2-G1	R1-2-SB	10*	.0014	.0005	20	.1570	11.147	.6750	.725	.365	.312	17/64	#10-24 x 3/8

\* Higher quality on request.