


GEAR RACKS

PITCH	STYLE	MATERIAL	AGMA QUALITY	PRESSURE ANGLE
80	RECTANGULAR	416 SERIES STAINLESS STEEL AND 2024-T4 ALUMINUM ANODIZED	10	20°


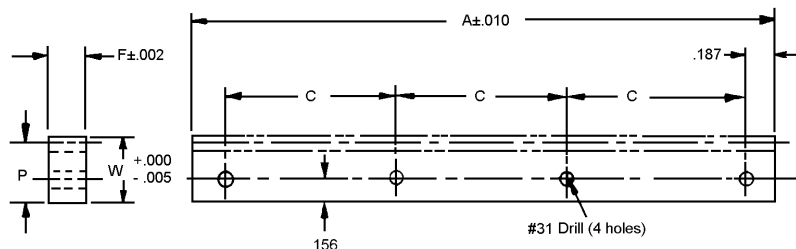


STOCK NO.	MATERIAL	A (Inch)	P (Ref.)	W	F	C
R4-19	STAINLESS ST.	5"	.3425	.355	.167	1.541
R4-20	ALUMINUM					

Available on request: special, modified and custom racks.

B

PITCH	STYLE	MATERIAL	AGMA QUALITY	PRESSURE ANGLE
80	RECTANGULAR	416 SERIES STAINLESS STEEL STRESSED RELIEVED	10	20°

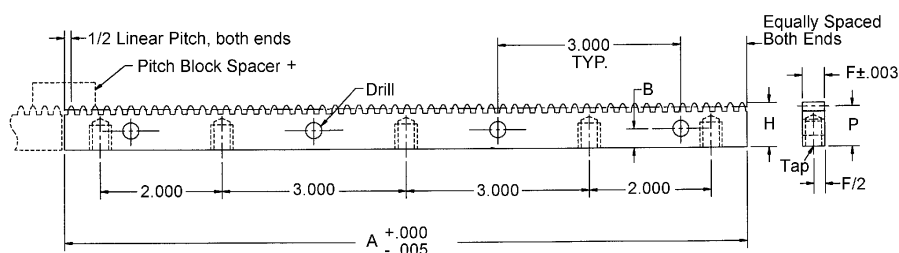

† Spacer block is designed for butting to achieve continuous lengths. On-Line pricing for AGMA 10 only.

RACKS	SPACER BLOCK	AGMA QTY. NO.	MAX ACCUM. ERROR	TOOTH TO TOOTH ERROR	PITCH	LINEAR PITCH	A INCH	P REF.	H +.000 -.005	F	B	DRILL	TAP
R1-10-G1	R1-10-SB	10*	.0014	.0005	80	.0393	11.028	.3375	.350	.167	.156	#31	#4-40 X 3/16

* Higher quality on request.